



CHENNAI LAB

An ISO 9001:2015 Certified Company

POLYPROPYLENE HYBRID ABSORBERS

»» Ultra-Premium Quality
Best Performance
35+ Years Electrical
Performance

FOR EMC CHAMBERS

Expect the Best from Chennailabb EPP Hybrid Absorbers. Unbreakable, Clean test site, 35+ years performance with Excellent impedance matched with ferrite tiles for Broadband frequency range of operation from 30 MHz to 40 GHz.

Chennailabb Ultra-premium high performance Polypropylene Hybrid Absorbers are made of molding process and the State-of-the-art carbon synthesis process ensures extremely high uniformity of carbon powder density throughout the absorber. C-LABB-PP-PY-HY series hybrid absorbers provide excellent performance in normal incidence and off angle incidence in EMI/EMC test chambers.

» FEATURES

- Broadband Frequency Range of Operation from 30 MHz to 40 GHz
- Power Handling Capacity of 4.8 kW/m² or 1353 V/m
- Fire Retardant as per NRL-8093 tests 1, 2, 3, UL94 HBF, DIN 4102 Class B2
- Water resistant per GB/T 4208-2017
- Maximum Service Temperature up to 120°
- Plug and pull installation, Long product life with excellent Electrical Performance
- 0% toxic gas emission
- Strong mechanical properties of these absorbers need decent amount of pressure to break. It's almost unbreakable in day to day testing activities
- Cleanroom equipment suitable per ISO 14644 Class 5
- ROHS and REACH compliant

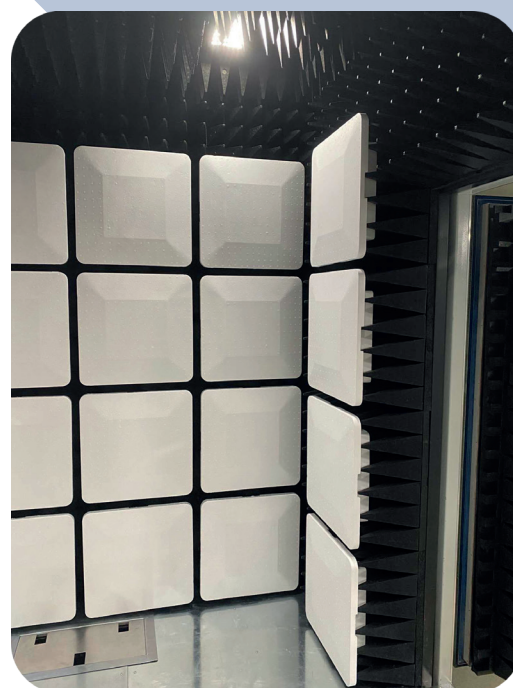
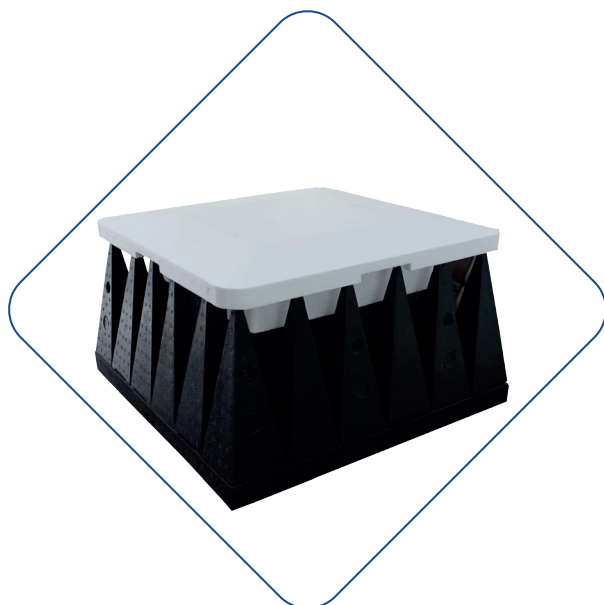
TYPICAL REFLECTIVITY AT NORMAL INCIDENCE OVER FREQUENCY RANGE IN - dB

MODEL NUMBER	30 MHz	50 MHz	100 MHz	500 MHz	1 GHz	3 GHz	5 GHz	10 GHz	18 GHz	40 GHz
C-LABB-PP-PY-HY-300	18	26	23	17	16	18	23	27	33	34
C-LABB-PP-PY-HY-500	19	26	23	19	20	25	28	36	44	46
C-LABB-PP-PY-HY-750	21	25	22	21	25	29	33	41	47	49

NOTE : Values shown are based on testing of laboratory test product and represent data that falls within normal range purposes. Construction standards and absorber mounting procedure defines accurate results. The given information is based on data and knowledge considered to be true and accurate and is offered for the user's consideration, investigation and verification but we don't warrant the results to be obtained.

PHYSICAL PROPERTIES (in mm)

MODEL NUMBER	Overall Width	Overall Height	Base Thickness	Tip Height	Tip Base Width	No. of Tips	Overall Weight in Kg
C-LABB-PP-PY-HY-300	600 x 600	300	40	260	100	36	2.7
C-LABB-PP-PY-HY-500	600 x 600	500	60	440	150	16	3.08
C-LABB-PP-PY-HY-750	600 x 600	750	80	670	200	9	4.51

PICTURES

CHENNAILABB

No. 19 (Old No.7), Porur Street, East Tambaram,
Chennai- 600 059, India.

+91 97890 53222 / +91 (044) 2239 5939

www.chennaiabb.com

sales@chennaiabb.com / support@chennaiabb.com

chennaiabb@yahoo.com